

\*Verify design shear stress requirements because there are not many channels that require a vegetated shear >12 lb/ft<sup>2</sup>.

\*\*Functional longevity varies by region because of differences in climatic conditions.

**Notes:**


1. Several American Excelsior Company (AEC) RECPs are available with 100% biodegradable, FibreNet netting.
2. If the goal of the project is to have netting gone within 90 days, then Curlex NetFree or AEC's white QuickMow™ netting should be used.

Remember to always ask these three questions:

1. What is the actual design shear stress for the channel?
2. How long do I need/want the product to last?
3. What is the soil type?

**This document is only a guide. Complete Technical Support, including free and easy to use ErosionWorks design software, is available at [www.Curlex.com](http://www.Curlex.com) or contact AEC for specific project recommendations.**

Earth Science Division American Excelsior Company RECP Channel Selection Guide (Unvegetated)

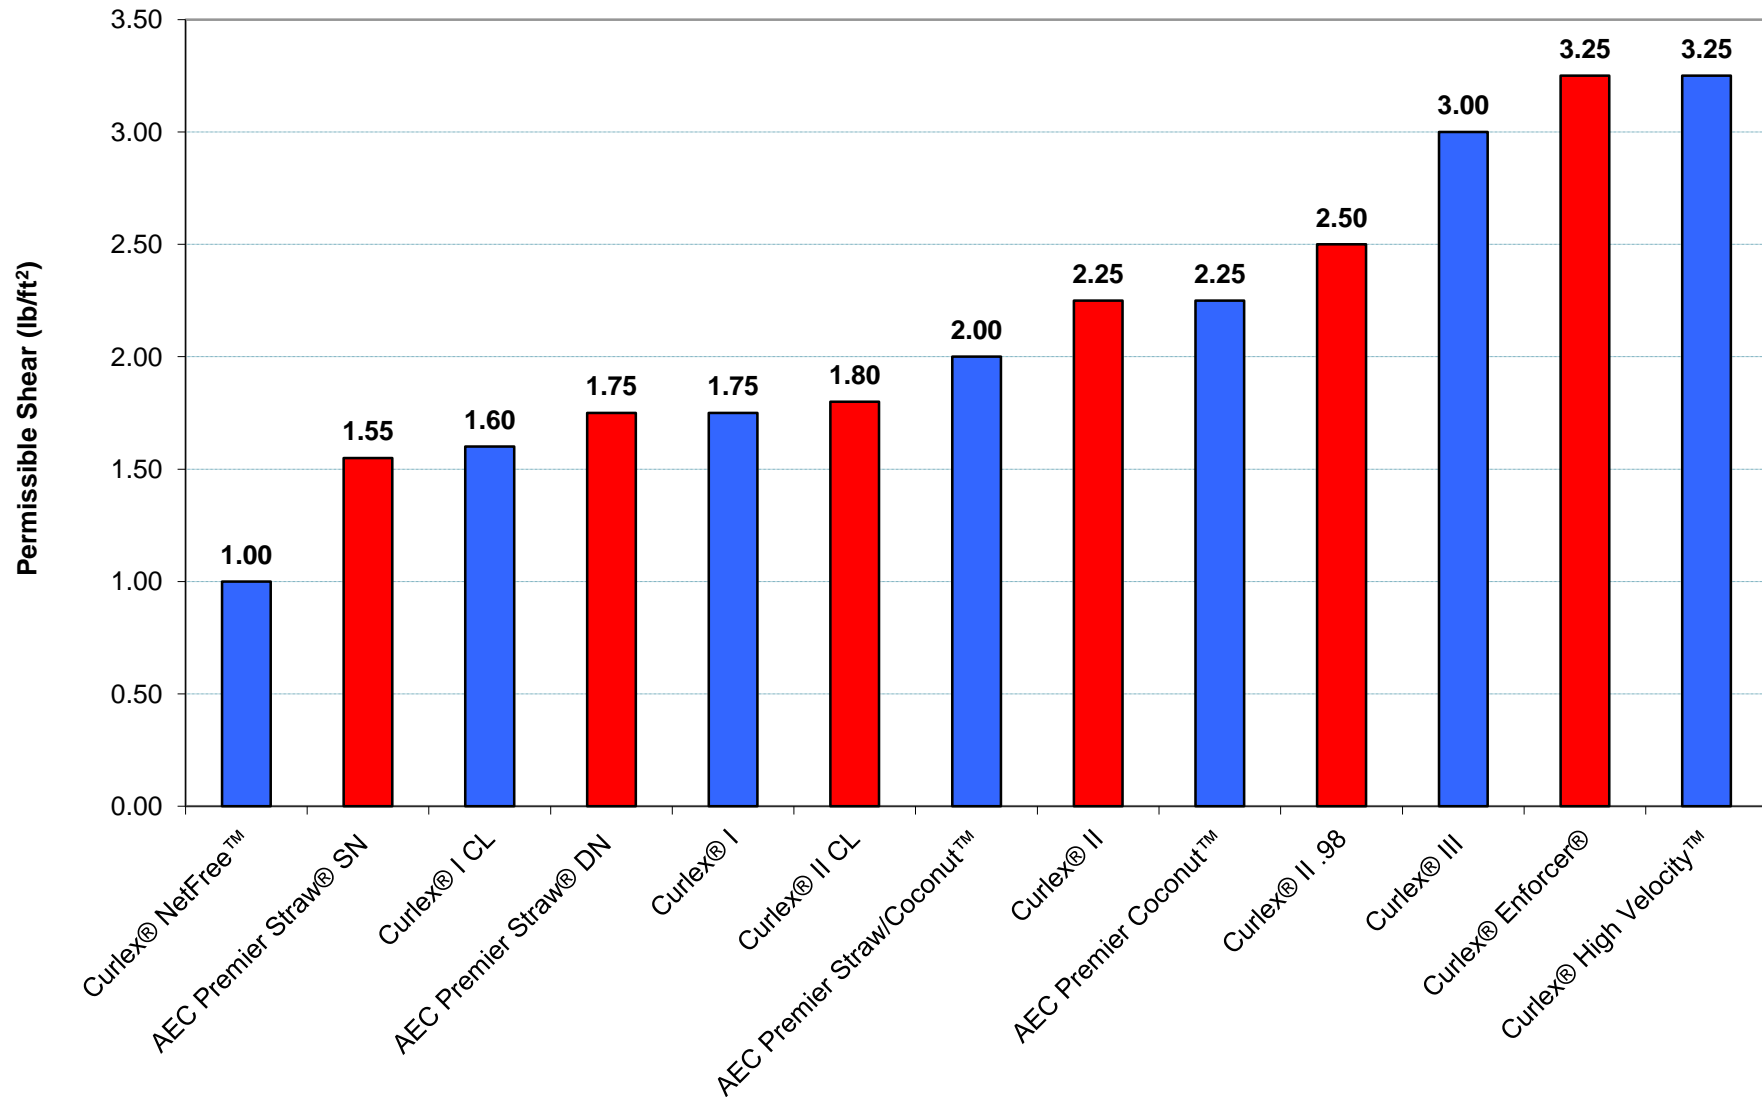



American Excelsior Company RECP Channel Selection Guide (Vegetated)

