


AEC Premier Straw/Coconut™ Staple Pattern Guide

For 8' wide AEC Premier Straw/Coconut Erosion Control Blankets

Application	Slope		Channel
	≤ 3:1	≤ 1.5:1	≤2.0 lb/ft ² (96 Pa) Shear Stress ≤8.5 ft/sec (2.6 m/sec) Velocity
Staple Pattern	A	B	B

○ = Staple Placement

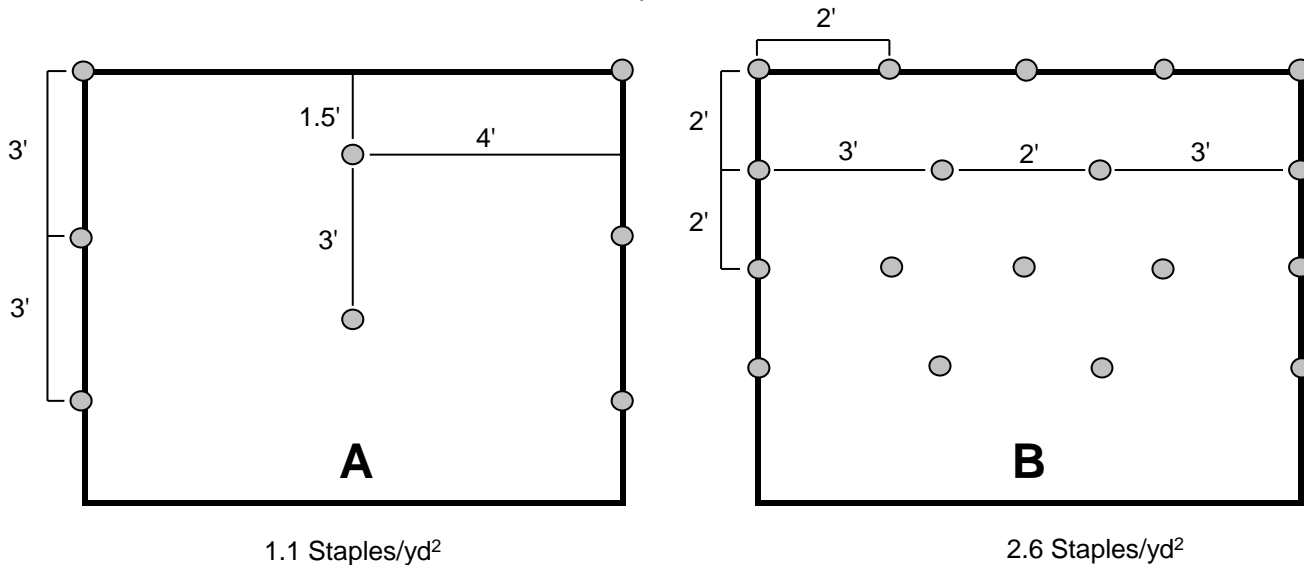

Notes:

- Recommended staples are a minimum 4" biodegradable E-Staple®, as provided by American Excelsior Company, or 6" wire for cohesive soils and 6" biodegradable E-Staple®, as provided by American Excelsior Company, or 8" wire for non-cohesive soils.
- Adjust staple pattern so staples are placed in critical channel points (e.g. slope interface, channel bottom) as illustrated below:

Critical channel points are circled.

